


# Mars Series

530W/535W/540W/550W/560W/

## SUN 72M-H8

MBB HALF-CELL MONO PV MODULE  
182MM CELLS

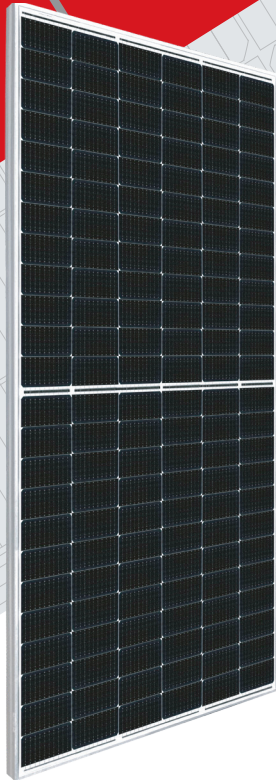

### COMPREHENSIVE CERTIFICATES

IEC61215 / IEC61730 / IEC61701 / IEC62716 / IEC62804  
ISO 9001: 2015 Quality management systems;  
ISO 14001: 2015 Environmental management systems;  
OHSAS 18001: 2007 Occupational health and safety management systems;

### KEY SALIENT FEATURES



High output power



Better power generation under shadows



Strong anti-hot spot ability



Strong mechanical load capacity



Super strong frame



1500V system voltage

### SUNERGY USA WORKS LLC


Founded in 2008, Sunergy is a manufacturer of high-performance photovoltaic products. With 12 manufacturing bases and more than 20 branches around the world, the company's business covers modules, photovoltaic power stations and EPC. Sunergy products are available in over 120 countries and regions and are used extensively in ground-mounted power plants, commercial & industrial rooftop PV systems and residential rooftop PV systems.

### QUALIFICATIONS AND CERTIFICATES



### LINEAR PERFORMANCE WARRANTY

- 15 Years Manufacturing Warranty
- 15 Years 90% Power Output
- 30 Years 80% Power Output

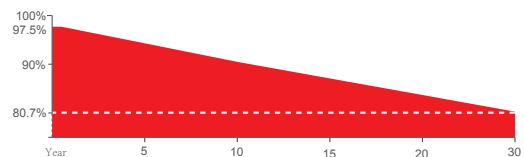


SUNERGY USA WORKS LLC  
[www.sunergyworks.com](http://www.sunergyworks.com)




# Mars Series SUN 72M-H8


## MECHANICAL DRAWINGS

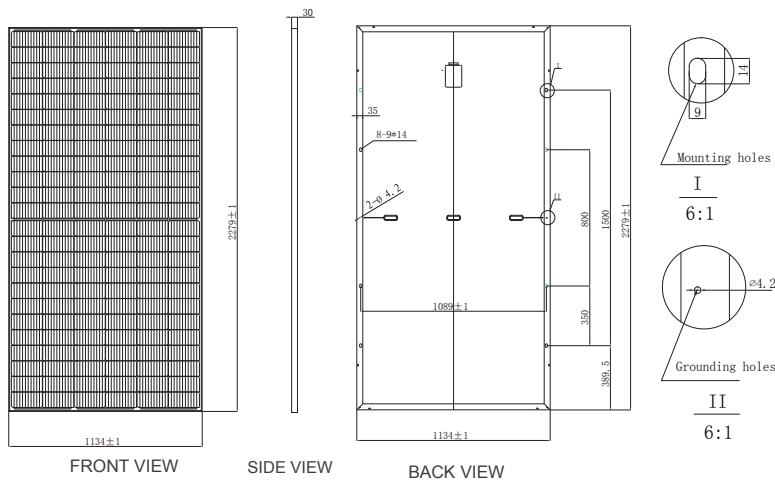

## I-V CURVES

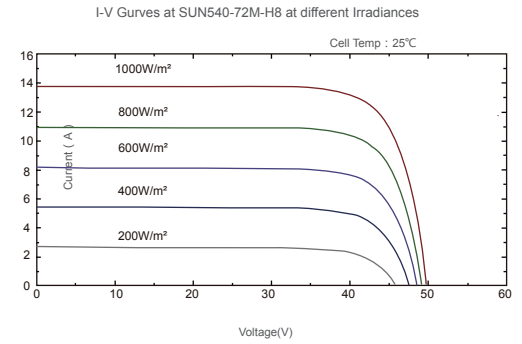

Power voltage current curve at different temperature



## MECHANICAL SPECIFICATION

Cell Type	Mono Crystalline 182x91mm
Number Of Cells	144 (6x24)
Dimensions(AxBxC)	2278x1134x35mm
Weights	29.0kg
Glass	3.2mm Tempered Low Iron Glass
Aluminium Frame	Anodised Aluminium
Junction Box	Split Junction Box (IP68 ,three diode)
Connector	Mc4 Compatible
Output Cables	4.0mm²,+300mm,-300mm Customized Length

## PACKING CONFIGURATION

Container	40' HQ
Pieces Per Pallet	31
Pallets Per Container	20
Pieces Per Container	620

## ELECTRICAL CHARACTERISTICS

Module Type	530W		535W		540W		550W		560W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power At STC(Pmax)	530W	399.2W	535W	403.0W	540W	406.8W	550W	414.3W	555W	420.1W
Short Circuit Current(Isc)	13.58A	10.97A	13.63A	11.01A	13.70A	11.07A	13.82A	11.17A	14.30A	11.50A
Open Circuit Voltage(Voc)	49.4V	46.2V	49.6V	46.4V	49.8V	46.5V	50.2V	46.9V	50.7V	47.5V
Maximum Power Current(Imp)	12.75A	10.40A	12.80A	10.44A	12.86A	10.49A	12.98A	10.58A	13.68A	11.32A
Maximum Power Voltage(Vmpp)	41.6V	38.4V	41.8V	38.6V	42.0V	38.8V	42.4V	39.1V	42.5V	38.9V
Module Efficiency	20.50%		20.70%		20.89%		21.28%		21.7%	
Power Tolerance	0~+5W		0~+5W		0~+5W		0~+5W		0~+5W	
Maximum System Voltage	VDC 1500V									
Maximum Series Fuse	25A									
Increased Snowload Acc.to Iec 61215	5400Pa									
Operating Temperature	-40~+85°C									
Number Of Bypass Diodes	3									
Norminal Operating Cell Temperature(Noct)	45°C±2°C									
Temperature Coefficient Of Pmax	-0.35%/°C									
Temperature Coefficient Of Voc	-0.27%/°C									
Temperature Coefficient Of Isc	0.05%/°C									

STC: 1000W/m2 irradiance, 25°C cell temperature, AM1.5. NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, wind speed 1m/s.

